
کاور مقره سرامیکی ۷۰ سانتی متری (عبوری)

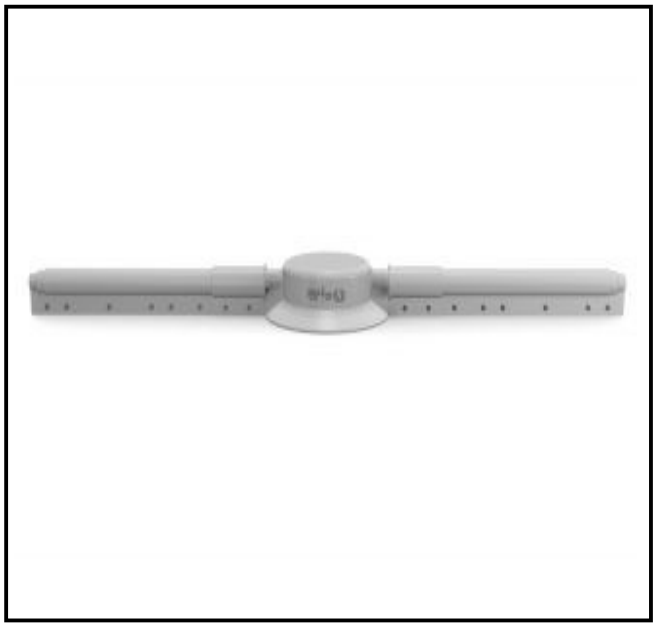

کاور مقره سرامیکی "یا " **کاور مقره سوزنی** (**Ceramic Insulator Cover**) "
برای عایق نمودن حوزه برقدار انواع مقره های سرامیکی یا مقره های سوزنی خطوط نیروی برق ایران به منظور جلوگیری از پرنده زدگی و بروز خاموشی های ناخواسته مورد استفاده قرار می گیرد. کاورهای مقره سرامیکی ساخت شرکت مهربد، شامل دو طراحی، مناسب برای انواع مقره های عبوزی و کناری، با طول های عایقی ۷۰ سانتی متر، مقاوم در برابر اشعه ماوراء بنفش (UV) و اشتعال پذیری، طراحی و ساخته شده است. در ضمن این کاور بدون باز نمودن هیچ قسمتی به صورت گرم قابل نصب بر روی مقره ها می باشد و قابلیت افزایش طول از هر طرف بوسیله کاورهای سیم ۳۰ و ۵۰ سانتی متری وجود دارد "

کد سفارش: CIC-70

نوع مقره: مناسب انواع مقره های سرامیکی ۲۴ و ۳۶ کیلوولت

طول عایقی: ۷۰ سانتی متر

موقعیت سیم: وسط مقره (عبوری)


جنس: سیلیکون و پلی الفین ولتاژ بالا مقاوم در برابر UV و شعله

طریقه نصب: خط گرم

ولتاژ کاری (KV): ۳۶

ولتاژ تست (KV): ۵۶

70 cm Ceramic Insulator Cover

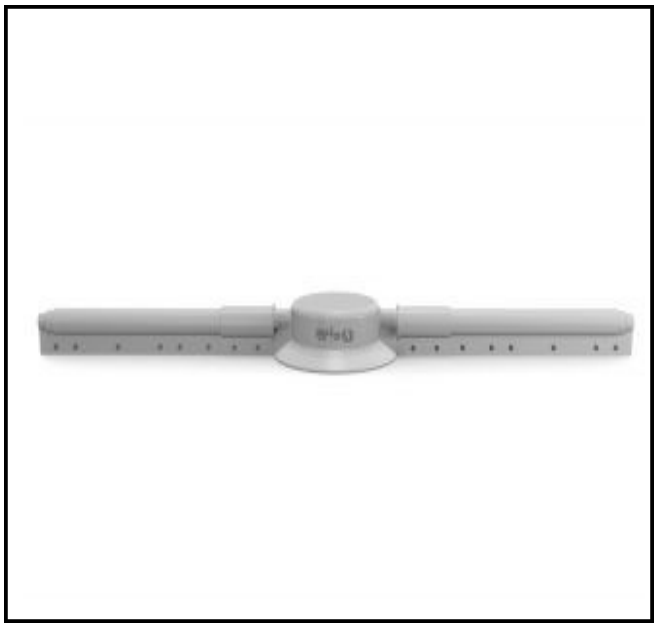

Ceramic Insulator Cover (also known as **Pin Insulator Cover**) is designed to insulate the energized area of various ceramic insulators and pin insulators used in Iran's power distribution networks, in order to prevent bird-related faults and unintended power outages.

Ceramic Insulator Covers manufactured by Mehrbod are available in two designs, suitable for both bushing-type and side-mounted insulators, with an insulation length of 70 cm. They are resistant to ultraviolet (UV) radiation and flame propagation.

Furthermore, these covers can be installed on insulators using the hot-line method, without removing any components. Their length can also be extended from either end by using 30 cm and 50 cm wire covers.

Code: CIC-35

Insulator Type: Suitable for Various Types of 24 kV and 36 kV Ceramic Insulators

Insulating Length: 70cm

Conductor Position: Center of Insulator (Line-Through)

Material: High-Voltage Silicone and Polyolefin, UV- and Flame-Resistant

Installation Method: Live-Line Installation

Operating Voltage (KV): 36

Test Voltage (KV): 56